
















PONUDA ELEKTRONSKE CIJENE

No.	Šifra	Slika	Veličina	Realna slika	Opis	Transportno pakovanje
Mutil Zone series						
1	MZ5021		5 x 2.13inch		Five 2.13-inch E-ink screens Screen color: black and white red/black and white red yellow LED light :7 colors Product size :314.9*34.6* 11.9mm Single screen display :48* 23.2mm Operating temperature :0-40℃ Battery life :5 Years (5 updates/day)" - Not waterproof rated	200pcs 40*32*23(cm) 7.5kg
Mercurius series						
1	MTag15R				Size: 1.54inch LED light: 7-Colors Dimension: 36*46*14mm Active display: 27*27 mm Working temperature: 0-50℃ Battery:CR2450*1 Battery life: 5 years (5 update/day),replaceable	200pcs 40*32*23(cm) 7.5kg
2	MTag21R				Size: 2.13inch LED light: 7-Colors Dimension: 68*35*14mm Active display: 49*24 mm Working temperature: 0-50℃ Battery:CR2450*2 Battery life: 5 years (5 update/day),replaceable	180pcs 40*32*23(cm) 7.5kg
3	MTag29R				Size: 2.9inch LED light: 7-Colors Dimension: 91*41*14 mm Active display: 67*29 mm Working temperature: 0-50℃ Battery:CR2450*2 Battery life: 5 years (5 update/day),replaceable	80pcs 40*32*23(cm) 7.5kg
4	MTag42R				Size: 4.2inch LED light: 7-Colors Dimension: 99 * 94 * 14 mm Active display: 85 * 64 mm Working temperature: 0-50℃ Battery:CR2450*4 Battery life: 5 years (5 update/day),replaceable NFC support	60pcs 40*32*23(cm) 8.5kg
5	MTag58Q				Size: 5.83inch, 4-color screen (black, white, red and yellow) LED light: 7-Colors Dimension: 136 * 118 * 16 mm Active display: 119 * 88mm Working temperature: 0-50℃ Battery:CR2477*4 Battery life: 5 years (5 update/day),replaceable	20pcs 40*32*23(cm) 7.5kg
6	MTag75R				Size: 7.5inch LED light: 7-Colors Dimension: 183 * 129 * 16 mm Active display: 163 * 98 mm Working temperature: 0-50℃ Battery:CR2477*6 Battery life: 5 years (5 update/day),replaceable	20pcs 40*32*23(cm) 7.5kg

PONUDA ELEKTRONSKE CIJENE

No.	Šifra	Slika	Veličina	Realna slika	Opis	Transportno pakovanje
7	RS075 (6Colors)				Size: 7.3inch 6 colors LED light: 7-Colors Dimension: 182.5 * 128.9 * 16.3 mm Active display: 159.6 * 95.6 mm Working temperature: 15-35°C Battery: CR2477*6 Battery life: 5 years (5 update/day), replaceable	20pcs 40*32*23(cm) 7.5kg
Supergalaxy series						
8	STag21R				Size: 2.13-inch LED light: 7-Colors Dimension: 73*36*14 mm Active display: 49*24 mm Working temperature: 0°C~50°C Battery: CR2450*2 Battery Capacity: 1200mAh Battery life: battery package, 5 years (5 update/day), replaceable	180pcs 40*32*23(cm) 7.5kg
9	STag21F (Freezer)				Size: 2.13-inch LED light: 7-Colors Dimension: 72*39*15 mm Active display: 49*24 mm Working temperature: -25°C~25°C Battery: Specific low temperature battery Battery Capacity: 1500mAh Battery life: 5 years (Non-replaceable)	180pcs 40*32*23(cm) 7.5kg
10	STag26R				Size: 2.66-inch LED light: 7-Colors Dimension: 72*39*15 mm Active display: 31*60 mm Working temperature: 0°C~50°C Battery: Specific low temperature battery Battery: CR2450*2 Battery Capacity: 1200mAh Battery life: battery package, 5 years (5 update/day), replaceable	180pcs 40*32*23(cm) 8.5kg
11	STag29R				Size: 2.9-inch LED light: 7-Colors Dimension: 94*43*12 mm Active display: 29*67 mm Working temperature: 0°C~50°C Battery: CR2450*2 Battery Capacity: 1200mAh Battery life: battery package, 5 years (5 update/day), replaceable	160pc 40*32*23(cm) 8.0kg
12	STag29AR (with button)				Size: 2.9-inch LED light: 7-Colors Dimension: 103*43*13 mm Active display: 29*67 mm Working temperature: 0°C~50°C Battery: CR2450*2 Battery Capacity: 1200mAh Battery life: battery package, 5 years (5 update/day), replaceable	80pcs 40*32*23(cm) 7.5kg
13	STag42R				Size: 4.2-inch LED light: 7-Colors Dimension: 105*94*14 mm Active display: 85 * 64 mm Working temperature: 0°C~50°C Battery: CR2450*4 Battery Capacity: 1200mAh Battery life: 5 years (5 update/day), replaceable	60pcs 40*32*23(cm) 8.5kg



GERMAPOS doo

Polje bb, 77220 Cazin

germaposbh@gmail.com

+387 62 767 003

<https://germapos.ba/>



CPU doo

Gnjilavac bb,Cazin

comp@bih.net.ba

+387 62 837 853




<https://cpuinfotech.ba/>



PONUĐA ELEKTRONSKE CIJENE

No.	Šifra	Slika	Veličina	Realna slika	Opis	Transportno pakovanje
21	DS042 (ultra-thin)				Size: 4.2inch LED light: 7-Colors Dimension: 98 * 88 * 9.9 mm Active display: 84 * 62.8 mm Working temperature: 0-40℃ Battery : CP502440*2 , 2400mAh, 5 years (5 update/day),replaceable NFC support	60pcs 40*32*23(cm) 8.5kg
22	DS042F (Freezer)				Size: 4.2inch (black,white) LED light: 7-Colors Dimension: 98 * 88 * 9.9 mm Active display: 84 * 62.8 mm Working temperature: -25℃~25℃ Battery : CP502440*2 , 2400mAh, 5 years (5 update/day) (Non-replaceable) NFC support	60pcs 40*32*23(cm) 8.5kg
23	DS116 (ultra-thin)				Size: 11.6inch LED light: 7-Colors Dimension: 263.8*193.8*8.2 mm Active display: 243.9*162.4 mm Working temperature: 0-40℃ Battery: 3200mAh, 5 years (5 update/day),replaceable NFC support	5pcs 40*32*23(cm) 7.5kg
Electronic conference table series						
25	STag75R (Electronic Conference Name Brand)				Size: 7.5-inch double size LED light: 7-Colors Dimension: 180 * 100 * 143 mm Active display: 163 * 97 mm Working temperature: 0℃~50℃ Battery life: AAA*4: 2 years (5 update/day), replaceable Battery Capacity: 2600mAh	6pcs 40*32*23(cm) 7.5kg
26	WS075 (Electronic Conference Name Brand)				Metrial: 6063-T6 Aluminum Alloy, AC2300 Color: Silver Size: 7.5inch double size V shaped stand LED light: 7-Colors Dimension: 179.5 * 123.3 * 88.3 mm Active display: 163*97.6 mm Working temperature: 0-40℃ Battery: high-capacity polymer lithium battery, TYPE C Charging ,8-months after battery charging (5 updates/day) Battery capacity: 1400mAh NFC support	16pcs 40*32*23(cm) 7.5kg

PONUDA ELEKTRONSKE CIJENE

No.	Šifra	Slika	Veličina	Realna slika	Opis	Transportno pakovanje
27	RS075V (6 Colors)				Size: 7.3inch 6 colors Metrial: 6063-T6 Aluminum Alloy, AC2300 Color: Silver LED light: 7-Colors Dimension: 179.5 * 123.3 * 88.3 mm Active display: 159.6*95.7 mm Battery: high-capacity polymer lithium battery, TYPE C Charging ,8-months after battery charging (5 updates/day) Battery capacity: 1400mAh NFC support	16pcs 40*32*23(cm) 7.5kg
28	DS073 (6 Colors)				Size: 7.3inch 6 colors Metrial: 6063-T6 Aluminum Alloy, AC2300 Color: Silver LED light: 7-Colors Active display: 159.6*95.7 mm Battery: high-capacity polymer lithium battery, TYPE C Charging ,10- months after battery charging (2 updates/day) Battery capacity: 1400mAh	16pcs 40*32*23(cm) 7.5kg
29	DS075 (3 Colors)				Size: 7.5inch 3 colors Metrial: 6063-T6 Aluminum Alloy, AC2300 Color: Silver LED light: 7-Colors Active display: 159.6*95.7 mm Battery: high-capacity polymer lithium battery, TYPE C Charging ,10- months after battery charging (2 updates/day) Battery capacity: 1400mAh	16pcs 40*32*23(cm) 7.5kg
Colorful electronic signage series						
30	RS133				Screen size :13.3 inches (black, white, red, yellow, blue & green) LED light: 7 colors Product size :304.0*233.0* 10.3mm Display: 268.8*201.2 mm Resolution: 1600*1200 pixels Weight: 760g Working temperature :0℃~50℃ Storage temperature: -25℃~50℃ Battery: Rechargeable polymer lithium battery, 4000mAh	
31	RS253				Screen size :25.3 inches, CMYW (blue, magenta, yellow, white) Product size :584.0*340.0* 30.5mm Display :560.0 x 315.0 mm Resolution: 3200*1200 pixels Weight: 3500g Working temperature :15℃~35℃ Storage temperature: -25℃~50℃ Battery: Rechargeable polymer lithium battery, 3500mAh Charging interface: TypeC Battery life :4 months (swipe picture 3 times a day)	
Gateway						

GERMAPOS doo

Polje bb, 77220 Cazin

germaposbh@gmail.com

+387 62 767 003

<https://germapos.ba/>



CPU doo

Gnjilavac bb, Cazin



comp@bih.net.ba

+387 62 837 853

<https://cpuinfotech.ba/>



PONUĐA ELEKTRONSKE CIJENE

No.	Šifra	Slika	Veličina	Realna slika	Opis	Transportno pakovanje
32	Gateway G1-E (3-channel Bluetooth)				3-channel Bluetooth Supports input DC 5.0V, 1A, micro-USB Supports 10/100 Ethernet with 802.3af PoE Supports firmware upgrade over-the-Air Supports HTTP(support SSL/TLS)/MQTT(support SSL/TLS) Operating temperature:-10~+50℃ Each can cover 1000 e-labels within 300m².	20pcs 40*32*23(cm) 7.5kg
33	Gateway G1-E (6-channel Bluetooth)				6-channel Bluetooth Supports input DC 5.0V, 1A, micro-USB Supports 10/100 Ethernet with 802.3af PoE Supports firmware upgrade over-the-Air Supports HTTP(support SSL/TLS)/MQTT(support SSL/TLS) Operating temperature:-10~+50℃ Each can cover 1000 e-labels within 300m².	20pcs 40*32*23(cm) 7.5kg
34	PCIE card (MP01H-7201C)		PCIE Bluetooth communication card		It can be used with Huawei AP, support our Bluetooth electronic tag communication, and adapt to Huawei AP models: AirEngine 5760-51 AirEngine 6760-X1/X1E AirEngine 8760-X1-PRO AirEngine 5761-12	

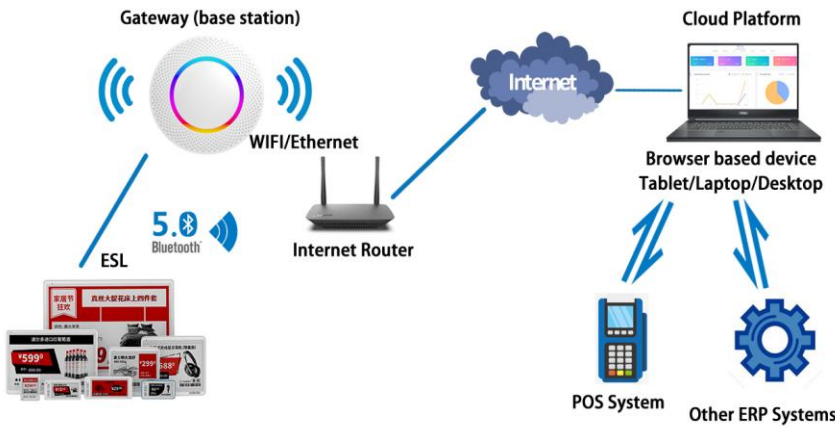
System platform

35	License fee for Cloud platform (offer API for integration with POS ERP systems)	Option A: Minew server	
36		Option B: local installation on the client server	
37		Option C: Distributed architecture system This is recommended when the number of labels the server needs to host reaches 80k.	

ESL Demo Kit

No.	Model No.	Picture	How it works	Packing details
-----	-----------	---------	--------------	-----------------

PONUDA ELEKTRONSKE CIJENE

No.	Šifra	Slika	Veličina	Realna slika	Opis	Transportno pakovanje
38	ESL demo kit					46 x 12 x 37CM 5.5kgs
39	ESL demo kit colorful					

Bluetooth 5.4 E-Labels

40	STag58P		★ Using the latest Bluetooth 5.4 communication protocol, the connection and data transmission process are encrypted, and users can conduct secondary development based on existing hardware ★ Dot matrix e-ink, display content can be freely defined, flexible display is not restricted by language ★ ESL supports Periodic Advertising with Responses (PAWR) to control and update thousands of individual shelf labels with low latency through a single gateway, enabling connectionless two-way data communication between a single access point and thousands of end nodes ★ supported by Nordic SoftDevice controller (Bluetooth 5.4 certified) in nRF Connect SDK; ★ ultra-low power 2.4GHz radio; ★ Native NFC support and Over-The-Air Device Firmware Update(OTA-DFU); ★ Working environment: 0~40°C ★ Ultra-low power consumption, refresh 5 times a day, the battery can be used for about 6 years; ★ Three color LED ★ Replaceable battery			
----	---------	---	---	--	--	--

GERMAPOS doo

Polje bb, 77220 Cazin

germaposbh@gmail.com

+387 62 767 003

<https://germapos.ba/>

CPU doo

Gnjilavac bb,Cazin















comp@bih.net.ba




+387 62 837 853

<https://cpuinfotech.ba/>

DRŽAČI I DRUGI ALATI ZA ELEKTRONSKE CIJENE

Installation Accessories							
No.	Šifra	Broj modela	Slika	Realna slika	Opis	Za veličine	Jedinica mjere
1	41502030155 (MT2901) 41502030037 (ST2911) 41502030038 (ST2901) 41502030036 (ST2601) 41502030131 (MT2101)	Display protect casing			Transparent PC Protector Size : adapt 2.1"/2.6"/2.9" display, Material: Transparent PC (PC1100) Color: Colorless and transparent, Surface treatment: smooth surface, high transparency	2.1"/2.6"/2.9"	pcs
2	20499010021	Rail A			37*14*1000MM, (per meter include 3 double-sided tape, 3 Angle adjusters and 2 anti-scratch plugs)	MTag/STag/DS available 1.54"/2.13"/2.66"/2.9"/3.5'	meters
3	20499010029	Rail B			37*14*1000MM, (rail + anti-scratch plugs, 1 m rail with 2 anti-scratch plugs, adjustable angle of the rail itself, comes with adhesive backing)	MTag/STag/DS available 1.54"/2.13"/2.66"/2.9"/3.5'	meters
4	41502030283	Rail C			Flat rail, size: 18.5*3.75*1000mm, transparent PVC, come with acrylic tape (14*0.5mm) Requires the purchase of Multi-angle Flake Style Inserts and Adaptor to be used together to hold the label	MTag/STag/DS available 1.54"/2.13"/2.66"/2.9"/3.5'/4.2"/5.8"/7.5	meters
5	41502030265	Multi-angle Flake Style Inserts - REE026			Multi-angle Flake Style Inserts Plug-in rail MEE-V004 Color: Transparent Material: PC	2.13"~5.8", The DS042 can be used directly. Other models require an adapter	pcs
6	41502030164 (for MT/ ST series)	Adaptive backboard 001			Adaptive backboard; (for MTag/STag series) Material: Transparent PC Color: colorless and transparent; There are four clasps on the front for tag assembly, and functional slots on the back for a variety of accessories	(for MT/ ST series) 2.13"/2.66"/2.9"/3.5"/4.2"/5.8"/7.5"	pcs
7	41502030122 (for DS series)	Adaptive backboard 002 (MTA-10 adaptive backboard)			MTA-10 adaptive backboard Lettering MTA-10 (1)/(2) For Ultrathin electronic label (DS Tag series) Material: PC1100R The fog surface is colorless and transparent Size: 41.7*39.1*10.4mm	(for DS series) 2.13"/2.66"/2.9"/3.5"/4.2"	pcs
8	20499010027	Mini T-Shape Stand 001			Multi-angle Flake Style Inserts + Adaptive backboard 001 Color: Transparent Material: PC Most used for small size tags (MTag/STag series)	(for MT/ ST series) 2.13"/2.66"/2.9"/3.5"/4.2"/5.8"/7.5"	set
9	20499010028	Mini T-Shape Stand 002			Multi-angle Flake Style Inserts + Adaptive backboard 002 Color: Transparent Material: PC Most used for small ultrathin size tags (DS Tag series)	(for DS series) 2.13"/2.66"/2.9"/3.5"/4.2"	set
10	41502030238 (for DS042)	Adaptive backboard 003 (MTA-11 rotating stand)			MTA-11 rotating stand Lettering MTA-10 (1)/(2) For Ultrathin electronic label (DS042) Material: PC1100R The fog surface is colorless and transparent Size: 41.7*18.1*9mm	DS042	pcs
11	41502030325 20499010032 (MT/ ST) 20499010033 (DS)	Magnetic back panel			Magnetic back panel, 44.9*35.5*10.6mm, transparent P. Magnetic back plate + adapter back plate; With adapter back plate, can be equipped with 2.1-4.2 size tags, mostly used for all series small size tags	2.13"/2.66"/2.9"/3.5"/4.2"	set
12	41501000007	Removal tool			ESL disassembly tool, 110*29.5*2mm, 420 martensitic stainless steel, chrome-plated bright silver, passed 24-hour salt spray test; commonly used for rail mounting labels and battery cover removal	for all labels	pcs
13	41504010004	Double-sided tape			Model: BT6610C; Size: 100*25*1mm, colorless and transparent, suitable for clean and tidy surface adhesion, easy to install without residue.	for all labels	pcs
14	41502000003	Mushroom Buckle (Velcro)			3M Dual Lock, size: 1000mm x 25.4mm x 3.8mm, color: translucent, single-sided transparent adhesive	for all labels	meter
15	20499010005 (white) 20499010004 (transparent) Sufficient stock	T-Shape Stand A			ABS&PS1904 Rotation 50° White or Transparent material, use for desk, table, ect	2.13"/2.66"/2.9"/3.5"/4.2"/5.8"	pcs
16	20499010011 (stand+adapter MT/ST) 41502030169 (only stand)	T-Shape Stand B			include adapter, Transparent PC Multiple angles adjustable T-shape Stand , need to work with adaptive backboard; table product, use for desk, table, ect, can be assembled 2.1~7.5 inch labels, mostly used for 2.1~4.2 inch small size label table	2.13"/2.66"/2.9"/3.5"/4.2"/5.8"	set

17	20499010010 (stand + adapter ST/MT) 41502030166 (only stand)	T-Shape Stand C			include adapter, Transparent PC Multiple angles adjustable T-shape Stand , need to work with adaptive backboard; table product, use for desk,table,ect, can be assembled 2.1~7.5 inch labels, mostly used for 2.1~4.2 inch small size label table	MTag/Stag/DS available 2.13"/2.66"/2.9"/3.5"/4.2"/5.8"/7.5"	set
18	20499010009 (stand + adapter MT/ST) 41502030165 (only stand)	T-Shape Stand D			include adapter, Transparent PC Multiple angles adjustable Pedestal and needs to work with adaptive backboard; Table products, with suitable backplane can be equipped with 2.1~4.2 inch labels, mostly used for 2.1~2.9 inch label table use, raise 70mm height, can be pressed under the cooked food plate	MTag/Stag/DS available 2.13"/2.66"/2.9"/3.5"/4.2"	set
19	41501000015	Aluminum alloy folding bracket			Folding bracket (PM1), 125*80 (folding size), aluminum alloy + silicone, deep space gray	4.2"/5.8"/7.5"/11.6"	pcs
20	20499010007	Metal Lifiable bracket for single tag			include adapter, Metal Height: 280-480mm; can't adjust angel	MTag/Stag/DS available 2.13"/2.66"/2.9"/3.5"/4.2"/5.8"/7.5"	set
21	20499010018 (clip + adapter MT/ST) 41502030175 (only clip)	Clip 1			Basket or Glass etc Needs to work with adaptive board Color: Gray, with one vertical shaft, one radial shaft, radial shaft with functional cuttings	MTag/Stag/DS available 2.13"/2.66"/2.9"/3.5"/4.2"/5.8"/7.5"	set
22	20499010016 (clip + adapter MT/ST) 41502030173 (only clip)	Clip 2 (Horizontal)			Transparent PC Included adapter, Used for 12-20mm thickness laminates, Multiple angles adjustable	MTag/Stag/DS available 2.13"/2.66"/2.9"	set
23	20499010017 (clip + adapter MT/ST) 41502030174 (only clip)	Clip 3 (vertical)			Transparent PC include adapter, Used for 12-20mm thickness laminates, Multiple angles adjustable It can be equipped with 2.1~7.5 inch labels, mostly used with 2.1~4.2 inch labels, for 12-20mm thick rattan baskets, wood or glass and other materials of vertical boards, which can be adjusted from multiple angles	MTag/Stag/DS available 2.13"/2.66"/2.9"/3.5"/4.2"/5.8"/7.5"	set
24	41502030266	Clip 4 (Vertical)-REE-M018			LSWL, Board Clamp (Vertical), Model: REE-M018, 13*28*18.5mm, PC, Transparent, with universal insert at one end, can be matched with adapted backing boards, can clamp 5~13mm thick boards, non-adjustable angle, commonly used for small size labels.	Requires an adapter. for all labels	pcs
25	41502030293	Glass clamp (horizontal)			Glass clamp (horizontal), for 3-10mm thick layers, adjustable at multiple angles, with a multi-function insert at one end, for use with 2.1~2.9 inch small labels	2.13"/2.66"/2.9"/3.5"/4.2"/5.8"/7.5"	pcs
26	20499010012 (hook + adapter) 41502030167 (only hook)	L-Shape Hook (6mm or 8mm)			L-shape hook + adapted backing plate; REE009-B, hook/pendulum product with adapted backing plate, used with 2.1~4.2 inch small size labels, used for L-shape display pole, can be installed with pole diameter 6mm or 8mm in two sizes.	2.13"/2.66"/2.9"/3.5"/4.2"/5.8"/7.5"	set
27	41502030159	MTA Hook			PC1100 56*45*13.5MM Rotation 180° Specification: MTA Transparent Hook With four clasps, suitable for small size electronic shelf labels, Size: 55.9*45.2*13.6mm, Material: PC1100 Color: Colorless and transparent Surface treatment: highlighter finish	MTag/Stag available 2.13"/2.66"/2.9"	pcs
28	20499010013 (hook + adapter MT/ST) 41502030170 (only hook)	T-Shape Hook C (3-6mm)			T-hook with adapter back board, Suitable diameter 3-6mm With adaptive backplane, Use with 2.1 to 2.9 inch small size labels Suitable for 3-6mm diameter mesh hook	MTag/Stag available 2.13"/2.66"/2.9"	set
29	20499010014 (hook + adapter MT/ST) 41502030171 (only hook)	T-Shape Hook B (5-9mm)			T-hook with adapter backboard, adapter diameter 5~9 mm T-hook with adaptive backboard Use with 2.1~2.9 inch small size label, Suitable for diameter 5-9mm mesh hook	MTag/Stag available 2.13"/2.66"/2.9"	set
30	20499010015 (fork + adapter MT/ST) 41502030172 (only fork)	Fixture for ice			Model: REE002-B; for insertion into ice stacks or grains, with universal insertion strip at the top, for use with 2.1~7.5 inch labels	MTag/Stag/DS available 2.13"/2.66"/2.9"/3.5"/4.2"/5.8"/7.5"	set
31	41502030158	Bigger Size Hook			Transparent PC 100*17*13mm could't adjust angel Strings,rope Maximum size: 108*25*13.5mm; Color: colorless and transparent; Surface treatment: highlighter finish. For large size tag suspension assembly	7.5"/11.6"	pcs
32	41502030390 (only hook) 20499010036 (MT/ST) 20499010037(DS)	U-shaped small hook			P24004E3I, U-shaped small hook + compatible backplate; HYZ13019-1, with REE-VLW001 compatible backplate, can be fitted with 2.1-7.5 size labels, commonly used with small-sized labels.	2.1-7.5 size labels	set

33	41502030392 (only hook) 20499010040 (MT/ST) 20499010041(DS)	9-shaped large hook			9-shaped large hook, model: REE-M003, 79.8*31.6*10mm, PC, transparent, with universal insert strip, compatible with mounting backplates, suitable for hanging on round rods with a diameter of 25~30mm.	2.1-7.5 size labels	set
34	41502030303	Hanging ring			Hanging ring, length 61mm, transparent PC, needs to be used with the back panel, suitable for 2.1~2.9 inch small labels	2.1~2.9	pcs
35	41502030393 (only hook) 20499010038 (MT/ST) 20499010039 (DS)	Round rod fastener			Round rod fastener, model: REE-M016, 42.52926.2mm, POM, off-white, with 2 universal insert strips, compatible with mounting backplates, commonly used on bottle caps or round rods.	2.1-7.5 size labels	set
36	20499000001	MTA-9 three-color warning light			No NFC, no magnetic switch, no screen, with white light, USB power cord (micro), red, yellow and green three-color housing and base, industrial packaging	/	pcs
37	20407000001	RGB-color warning light			Wireless warning light, including 6 batteries P23119E3B, no LOGO, ES008F6, nRF52810-QCAA, 8Mbit Flash, no screen, no NFC, no magnetic switch, RGB light, ER14505*6, translucent milky white PMMA lampshade and Pantone 427CP matte fine-grained shell, industrial packaging	/	pcs
38	10301000039	POE switch A			Specification: POE15F-48V-I, 2 ports, 48V-15W, lightning protection 4KV, 82.66*46.83*40.26mm, working temperature: 0-40℃	/	pcs
39	10301000041	POE switch B			Specification: GRT-480050, 2 ports, 48V-0.5A, 90.45*45.32*34.33mm, working temperature: 0-40℃	/	pcs
40	10301000038	POE switch C			LSWL, 5 ports, 100 megabits, 38W	/	pcs
41	10301000102	TL-SF1010P			10-port 100 Gigabit POE switch, model: TL-SF1010P, 8FE(POE)+2FE port design, POE power supply up to 62W, single-port POE power supply up to 30W, support dynamic power management and standard POE protocol consistency check functions	/	pcs
42	10301000104	TL-R479GPE-AC			9-port Gigabit POE, AP integrated enterprise router, model: TL-R479GPE-AC, POE power supply, AP management, routing three functions in one design; Total capacity of 100 PCS, built-in AC function can manage 20 wireless aps, the output power of the whole machine can reach 123W, single port power can reach 30W; 9 gigabit wired ports, support IPsec VPN and PPTP, L2TP VPN server/client mode, etc	/	pcs
43	41501000012	Home audio and video equipment TV hanger			Model: TV hanger C2, C2 display flat frame, C2 ultra-thin hanger; Metal material, color: black; The distance from the wall is 1cm, the general hole distance (75*75mm, 100*100mm), including the packaging box and the installation screw accessories	for DS116	pcs
44	10301000080	Sunmi Qbao L2 PDA			Sunmi Qbao L2 PDA, 5.5-inch HD 1280*720 IPS multi-touch screen, Qualcomm Snapdragon 8-core CPU, Android 7.1 operating system, 3GB RAM + 32GB ROM storage, Zebra SE4710 2D scanner, rear 13-megapixel camera, 5000mAh large-capacity battery, supports NFC, WIFI + Bluetooth, 4G Telecom/Unicom version	/	set

LCD SCREEN

Date: 2025-5-1

No.	Product name	Model No.	Product specification	Image	Unit	Sample	≤100	500	≥1K	Packing	Remark
LCD Hardware											
1	LCD electronic price tag	LCD-PM1011	10.1-inch HD LCD single-side screen : resolution 800*1280, full viewing Angle, true color display, 2.4/5G dual-band WIFI, Bluetooth, LINUX system							15pcs/ctn: 48*35*23cm G.W.: 7.4kg 30pcs/ctn: 48*35*43cm G.W.: 14.3kg	Black/White
2	LCD electronic price tag	LCD-PM1012	10.1-inch HD LCD double-sided screen : resolution 800*1280, full viewing Angle, true color display, 2.4/5G dual-band WIFI, Bluetooth, LINUX system							15pcs/ctn: 48*35*23cm G.W.: 8.8kg 30pcs/ctn: 48*35*43cm G.W.: 17.1kg	Black/White
3	LCD electronic price tag	LCD-PM1017	10.1-inch HD LCD single-side screen : resolution 800*1280, full viewing Angle, true color display, 2.4/5G dual-band WIFI, Bluetooth, LINUX system, 4 sets of HY-18650 model lithium battery (single battery 3.7V, 2600mAh), including metal folding small base, Type c interface, Support 5V 2A above specifications charger charging, charging can be used for 8-10 hours, shipped with 1.5 meters								The price includes 4 batteries (10400 MA)
4	LCD electronic price tag	LCD-PM1018	10.1-inch HD LCD double-sided screen : resolution 800*1280, full viewing Angle, true color display, 2.4/5G dual-band WIFI, Bluetooth, LINUX system, including vertical sheet metal base, TYPE C interface , support 5V 2A or above specifications charger charging, shipping with 1.5m TYPE C cable								
5	LCD electronic price tag	LCD-PM1019	10.1-inch HD LCD single-side screen : resolution 800*1280, full viewing Angle, true color display, 2.4/5G dual-band WIFI, Bluetooth, LINUX system, including vertical sheet metal small base, TYPE C interface , support 5V 2A or above specifications charger charging, shipping with 1.5m TYPE C cable								
6	LCD electronic price tag	LCD-PM1019X	10.1-inch HD LCD single-side screen : resolution 800*1280, full viewing Angle, true color display, 2.4/5G dual-band WIFI, Bluetooth, LINUX system, including vertical sheet metal small base, Type-C interface , support for 5V 2A or above specifications charger charging, shipping with 1.5m TYPE C wire E C wire								
7	Wall mounted LCD label	LCD-PM1015	10.1-inch HD LCD single-side screen ; Resolution 800*1280, full viewing Angle, true color display, 2.4/5G dual-band WIFI, Bluetooth, LINUX system, back cover punching processing, with wall hanging iron + with screws, standard DC line 30CM, support 12V 1A specification charging							Includes accessories: 1. Punch holes on the back cover 2. Wall mounting iron + screws 3. The DC cable is 30 cm 4. adapter 12V/1A	
Mounting fittings											
1	Rail 1 m	LCD-DG10	1m/pcs for LCD electronic price tag power supply and suspension, one can be hung 5pcs, no single or double screen, there are special holes on the rail for rope installation							G.W.: 8.87kg	
2	Rail 1.5 m	LCD-DG15	1.5m/pcs for LCD electronic price tag power supply and suspension, one can be hung 5-6pcs, no single or double screen, there are special holes on the rail for rope installation							G.W.: 13.3kg	
3	Conducting	LCD-MK01	For power supply, one for each rail								
4	Rail suspension wire rope 1 m	LCD-DS01	Rope length of 1 meters, with mounting screws, rope consumption: 1 meter Rail to use two, 1.5 meters Rail to use three								

